

Detection of Bone Tumor Using Convolution Neural Network Algorithm

Venkata Krishnamohan Chavali

Associate Professor, Department of Computer Science and Engineering, Malla Reddy College of Engineering for Women, Hyderabad -500100, Telangana, India

Abstract - Cancer is one kind of dangerous disease which can cause by the growth of unwanted cell. There are many different types of cancer and bone tumor is one of the parts of it and this has to be detected at earlier stage. Here, Magnetic Resonance Images will be used as input data and then preprocessing operations will be done and then features will be extracted and given to the convolution neural network which is an algorithm used in order to classify the images as tumor and non tumor. This algorithm gives best accuracy and performance with minimum loss.

Keywords: convolution, network, tumor, accuracy, benign, malignant.

1. INTRODUCTION

This Cancer, which causes unlimited cell multiplication, will divide the cells and grow out of control, forming malignant tumors and targeting nearby body components. This tumor has the ability to develop and impede the digestive, neurological, and circulatory systems, as well as release hormones that can cause body function to change. Cells are classified as cancer cells when their DNA has been damaged. In a normal cell, when DNA is broken, the cell either fixes the damage or it may die. If the DNA which has been damaged is not repaired before a person dies, the body will make unnecessary new cells as a result of the broken DNA.

Cells in the body frequently travel to all the other parts of body, forming tumors that eventually turn back into normal tissue. Metastasis is the medical term for this. Cancer cells then reach the circulation or lymph arteries of the human body. Bone cancer is of two types that is benign which is non cancerous and malignant which is most cancerous. They are frequently treated with surgical surgery. Bone tumours are dangerous because they can spread and endanger one's life. Bone cancer is a complicated disease that can result from a number of hereditary and physiological factors. It promotes uncontrolled cell proliferation, which leads to demonic bone tumours that spread throughout the body. At any joints there is a possibility of the bone that can turn to cancerous. Hemipelvectomy, often known as a hindquarter removal, is a treatment that involves removing the complete leg. Magnetic resonance Imaging is better than other scanning images because this gives better accuracy. The term "segmentation" refers to the partition of an image into many parts and the subsequent extraction of usable data from these areas. A variety of segmentation approaches have been applied on the MR images.

Tumors are abnormal new tissue growths that can appear in any organ of the body. Various types of cancer include lung cancer, brain cancer, and bone cancer. When cells in the body go rogue, cancer occurs, and bone cancer develops in the bone. Other bodily tissues may be damaged as well. As a result, other parts of the body will be affected by these tissues. Bone cancer is today considered one of the most serious and lethal tumors in the world, with the lowest survival rate after diagnosis. It is impossible to stress the importance of early detection of the cancer-prone area in an MRI scan for successful diagnosis and treatment of bone cancer.

Despite the fact that the specific cause of bone cancer is unknown, scientists have determined that some factors are associated to a higher risk. When the bone is subjected to therapy for more times then, lot of radiations will be passed into the bones so this may lead to the bone cancer in future. When cells in the body go rogue, cancer occurs, and bone cancer develops in the bone. Other bodily tissues may be damaged as well. As a result, other parts of the body will be affected by these tissues. Based on MRI scans, this method attempts to classify tumors as non-cancerous or malignant. In this paper, to develop the model we will be using bone region Magnetic resonance imaging in order to identify the bone tumor. This collection of MRI images from the different sources is called dataset. We have collected four different types of bone dataset that is normal bone, Stage 1 tumor bone, Stage 2 tumor bone and Stage 3 tumor bone MRI images. In total we have 300 bone images. These images will be splitted for the training and testing purpose. For training, the dataset is splitted to 70% and for testing this will be splitted to 30%. Tumor can be identified or

classified by using the convolution neural network algorithm which takes the image as input. In order to give the input to the model, first it should be preprocessed that is converting the RGB scale image to the grey scale image and then forming the array by the pixel in the grey scale image and then normalizing the array that is dividing each value of array with the maximum value of the array so that the values will be between -1 and 1.

2. RELATED WORK

C. K. Subramanian done a survey called bone malicious growth identification which uses CNN algorithm for image processing steps like image segmentation, pre processing. Here ultra sound resemble is used which are of bones. The results will be outputted with a precision of 98.11 % or up to it. In this survey paper, it contains process like pre processing, edge detection, segmentation and also feature extraction. Here by using feature extraction process the resulted features of the images will be evaluated with training dataset. This is efficiently highlights bone tumours[1].

The study by E. Hussein and M. A. Rahman employs a connected component labelling algorithm to detect bone tumours. The artificial neural network (ANN) is employed in this study to classify bone tumours. In this study up to 220 bones of MRI scans are under evaluation .with texture properties of these pictures being used to instruct and test the neuronal network. The classification results show that the neural network has a success rate of 92.50 percent when it comes to bone tumour classification. This study focuses on bone tumour identification is done using element labelling process .where in this process tumour size and category is identified easily. The proposed categorization approach has a 92.5 percent accuracy rate, which is acceptable. The goal of this project is to create a tool that can distinguish between malignant and benign bone cancers and thereby help with clinical diagnosis[2].

M. Aula, N. P. Lukaku, and M. P. Raja: For bone image segmentation, this paper used the CNN approach. By measuring the mean intensity of the selected area, the resulted image have to under go that process for bone cancer analysis. For the categorization of medical images with the appearance or non-appearance of tumor, and where threshold values have been proposed. This approach yields 95 percent accuracy while requiring less computational time.

M. A. Rehman and E. Hossain: This paper compares and contrasts living bone tumor separation techniques and proposes a device labelling process for bone tumour segmentation using MRI scans. On the basis of quantitative approaches, the living bone tumour separation algorithms are distinguished with the other one. Over the other segmentation approaches, the device labelling algorithm delivers the hugest average of the DSC 96.05 percent and average of the SSIM 97.33 percent, According to the comparative evaluation. On the basis of MR scans, this study compares and contrasts existing bone tumour segmentation approaches. This article also looked at an object labelling algorithm for bone tumour segmentation and evaluated it. The results of each algorithm's segmentation are also reported in this publication. The object labelling method performs well in terms. According to the comparison results. The region growth algorithm is shown to be the most efficient of the three techniques[6].

K. Shrivastava and A. Pandey: They are using a Computer Aided Diagnosing (CAD) system to analyse Computed Tomography images in this paper. Canny edge detector is to be used in image edge detection. though the Canny edge detector has significant drawbacks, such as the inability to differentiate edges that occur around objects, it is still superior than other standard edge detector approaches[7].

3. PROPOSED WORK

The entire technique for detecting bone cancer has three main components: MRI images are given as input and processed in three stages: image processing, image segmentation, and feature extraction and classification. The datasets are MRI pictures that are utilized for both training and testing. In the training set, we offer photographs of patients with bone cancer pneumonia and photos of persons who do not have bone cancer pneumonia. The Convolution Neural Network technique is used to train the model. Dicot is a technology that displays a two-dimensional depiction of bone density and detects all supplements in the bone. For detecting the degree of malignancy and bone fractures, MRI images provide excellent resolution. Our suggested system's main goal is to establish a quick accurate method for detecting bone cancer in its early stages.

The diagram below shows the system architecture.

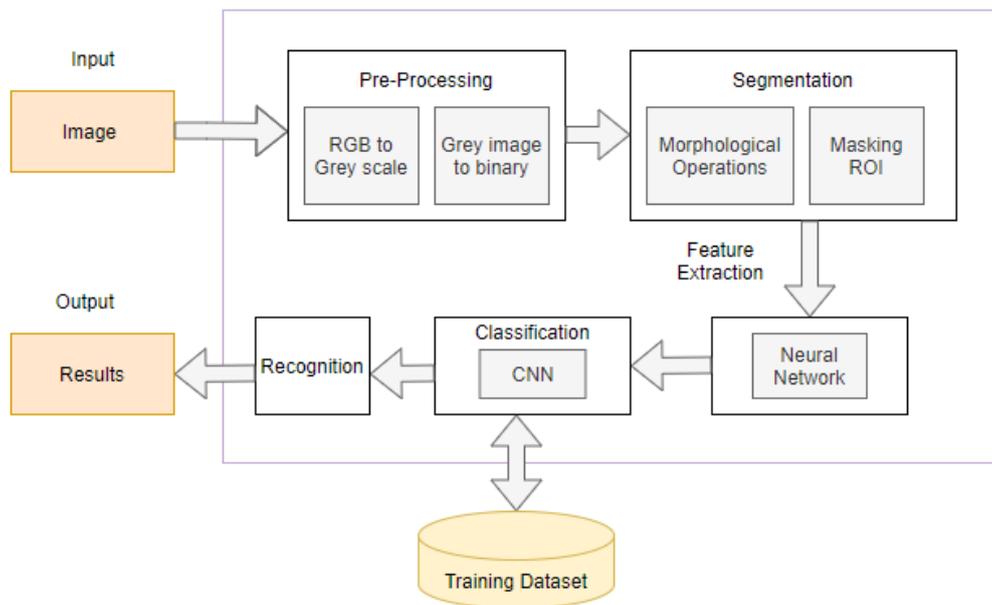


Figure 1: Block diagram of proposed

4. SYSTEM ARCHITECTURE

Pre-Processing: This is the first stage in improving the image's quality. The filtering technique is used to begin the picture processing stage. Noises such as occlusions, fluctuations in illuminations, and so on are common in images. As a result, these sounds must be eradicated. The Gabor filter is used to smooth out the pictures and eliminate noise. When compared to other filters, the key advantage of this filter is that it delivers great noise reduction with minimal blurring. The grey conversion is the next stage in the pre-processing. This is the process of transforming RGB-level pixels to gray-level pixels. This is done because, in comparison to a colour image, the grey level image is easier to process. The purpose of this conversion is to keep the brightness while removing the hue and saturation information.

Edge Detection: A type of edge detector that is used to determine the boundary between two areas with different grey level attributes. In cancer photos, edge detection was employed to extract important features for pattern identification. The Canny edge detector is used to identify an image's edge. It blurs the image first, then uses an algorithm to effectively thin the edges down to one pixel. This canny detector has the advantages of good detection, localisation, and reaction time.

Morphological operation: Morphological operations are used to determine the form, size, and connectedness of an object. The morphological technique's two main procedures are dilatation and erosion. To extend the zone, a dilatation procedure is employed. Erosion is a technique for removing or destroying tiny items. **Segmentation:** The technique of splitting a picture into several segments is known as segmentation. Super pixel segmentation and multilayer segmentation were employed in this approach. In comparison to previous segmentation approaches, this approach divides the picture into larger pixels. **Feature Extraction:** The most significant approach in image processing is picture feature extraction. It is crucial in the early identification of cancer. To identify cancer, visual characteristics are taken from the picture after segmentation. Feature extraction is a crucial stage that reflects the final findings in predicting whether a picture is cancerous or not. The quantity of resources needed to explain a huge quantity of data is reduced via feature extraction. It is the technique of detecting and representing particular elements of interest inside a picture for subsequent processing.

5. EXPERIMENTATION AND RESULTS

Once we collect all the dataset which is nothing but Magnetic Resonance images of bones which containing tumor and which are not having any tumour. These MRI images will be given for pre processing purpose. In this Step, the image will be converted from RGB level to grey level and then according to this gray scale image, the numpy array will be created. These numpy array will be normalized by taking the each and every array value and dividing it by the number which is largest in the array. Then these will be given for edge segmentation in order to identify smooth edges and then segmentation is done that is making few parts or making small segments of images so that it will be easy for processing. Then the required features will be extracted and then given

to the CNN algorithm and thereby predicting the proper result. The most dense component among these related components is removed and designated as a tumour part. Following segmentation, a total of 12 characteristics are collected from the segmented tumour for categorization purposes.

Max Pooling Layer: In this type of pooling, we will be taking or dividing the array into smaller sizes and then we will check the maximum number in each of the smaller matrix, then this larger number or the maximum value will be placed in other matrix of same size.

Activation layer: Activation functions are the functions that we will use in various neural network methods to compute based on the weights of the input and the bias that we will provide in each layer. In order to compute and minimize the loss and acquire the outcome in the desired manner, this employs methods such as gradient descent.

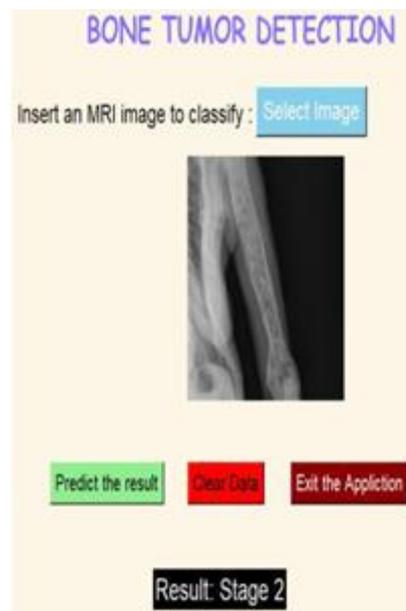


Figure 1: Result output 1

Developed Model

The above figure shows the developed model. Where we will input the image then that image will be displayed after this will be given as input to model there by it predicts for the above image as tumor is in Stage 2.

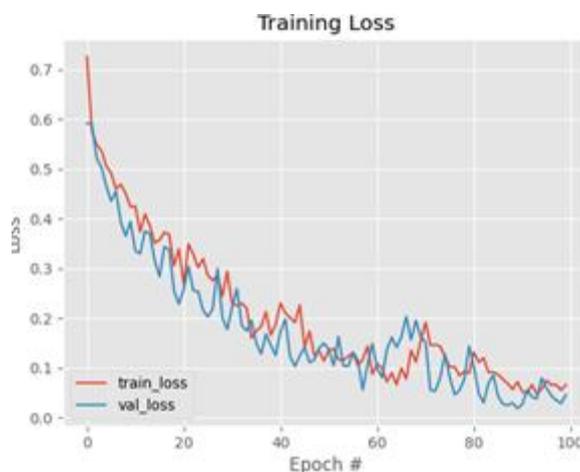


Fig 2: Training loss

A total of 220 bone MR photos were gathered from various tumour and orthopaedics websites, with 110 photos for each category of bone tumour. There are different layers in the CNN model and those layers which we use for experimentation are, Sequential

layer: This is one of the machine learning model which takes the input and produces the output which is sequential. This may contain the information like text, any audio records, video records and so on. This acts as the input for the models like recurrent neural network and convolution neural network. Batch Normalization: Batch normalization is a separate layer which we will be using in order to normalize the output values of the previous layer the input for this layer is the output from any of the activation layers. Convolution 2D layer: In the convolution two Dimension layer, the image will be taken as input and then we will take another matrix which will be used as multiplier matrix for multiplying the initial or the input matrix then the multiplication of these two will be done and finally we will include the result in the other matrix as the summation of first result matrix. For multiplying, we can take any strides in input matrix but whatever the size of the stride is taken, that must match with the multiplier size. The multiplier will be the subset of the original matrix.

6. CONCLUSIONS

The Bone Cancer is one of the most dangerous cancers so this must be taken care in the early stages only. In this model Magnetic resonance images will be used as the input. Our proposed system detects whether the cancer is present or not also if the cancer is present then it detects at what stage the cancer is that is either it is first or second or third stage. If the image has no tumor segments then this model gives the result as normal. This model achieves expected desired result at the end of the model. The extracted features from the image contain some specific information to understand the details of the image. The main purpose of extracting the features is to reduce the process complication and also to isolate various desired shape of the image. The accuracy of the classification stage depends on extracted features.

REFERENCES

- [1] H. Watanabe, R. Togo, T. Ogawa and M. Haseyama "Method to detect bone metastatic tumors using computed tomography (CT) images,"2019 Joint International Workshop on Advanced Image Technology (IWAIT) and International Forum on Medical Imaging in Asia (IFMIA), 2019, Singapore, Singapore.
- [2] E. Hossain and M. A. Rahaman, "Comparative Evaluation of Segmentation Algorithms for Tumor Cells Detection from Bone MR Scan Imagery,"2018 2nd Int. Conf. on Innovations in Science, Engineering and Technology (ICISSET) Chittagong, Bangladesh.
- [3] Pandey and S. K. Shrivastava, "A Survey Paper on Cancerous Bone Tumor Detection Using different Improved Canny Edge Detector," 2018 IEEE International Conference on System, Computation, Automation and Networking (ICSCA), 2018, pp. 1-5, doi: 10.1109/ICSCAN.2018.8541194.
- [4] C. K. Subramanian, "Bone malicious growth identification," Volume-8 Issue-6, April 2019, ISSN: 2278-3075 (Online) Published By: Blue Eyes Intelligence Engineering & Sciences Publication.
- [5] E. Hossain and M. A. Rahaman, "Connected component labelling algorithm for the detection of the bone tumor". International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395-0056 Volume: 07 Issue: 03 | Mar 2020.
- [6] M. Avula, N. P. Lakkakula and M. P. Raj, "kmeans clustering algorithm for bone image segmentation," FISCAS 2020 Journal of Physics: Conference Series 1591 (2020) 012010 IOP Publishing doi:10.1088/1742-6596/1591/1/012010
- [7] E. Hossain and M. A. Rahaman, "Detection of bone cancer using fuzzy C-mean clustering," September 2018Conference: 2018 4th International Conference on Electrical Engineering and Information & Communication Technology (iCEEICT).
